



CLAWsupport

IPATENTED

To ensure precise anchoring on the wall, our elements are designed to fit perfectly, allowing corrections of up to 10 mm in levels. This guarantees secure anchoring, providing stability and resistance to the structure fixed to the wall.

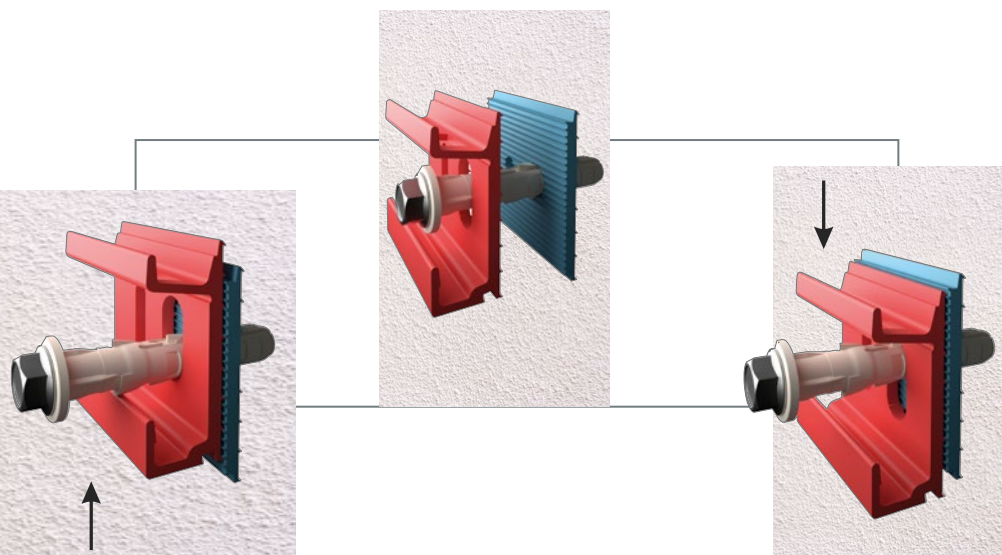

Different size measurements to accommodate different spacings

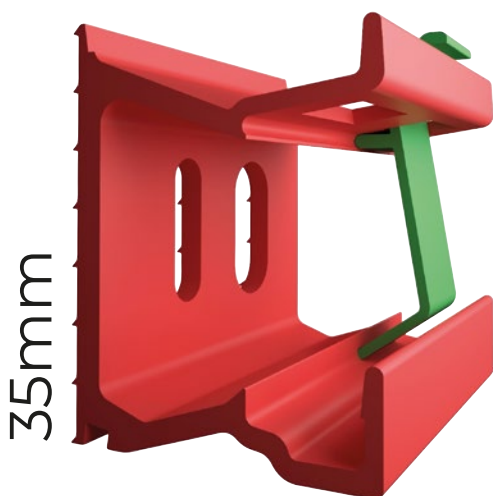

PLUG 10x80mm

RIVET 6mm


WOOD SCREW 1/4"

CHEMICAL PLUG Ø 8mm

SELF-DRILLING 5,5mm


Accessory designed to shift the wall hole by up to 6 cm, ideal for situations where the initial position does not allow for the attachment of the CLAW support, while maintaining the adjustment capability of up to 10 mm.

The shims are available in various thicknesses, varying by a few millimeters, allowing adjustments in the planimetry of up to 2 centimeters. These shims are easy to use and are intended to correct small unevenness and inclinations in the planimetry.

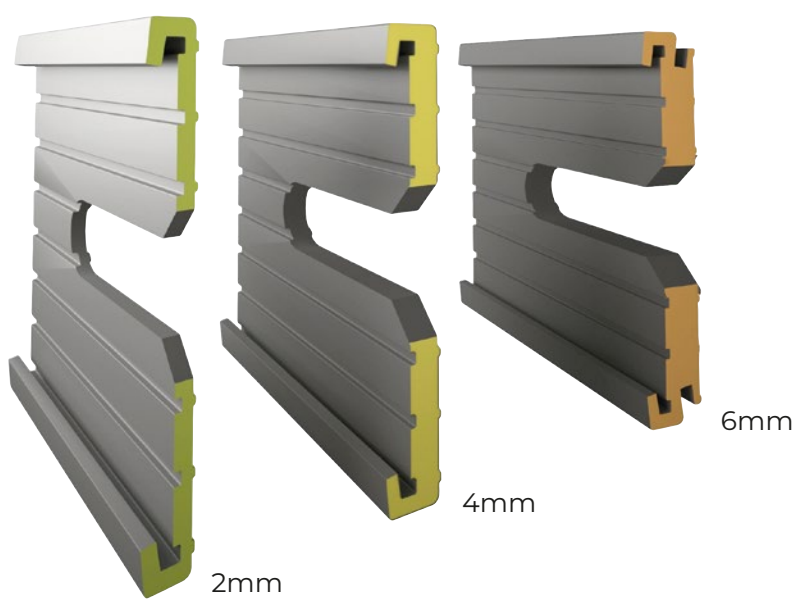

CLIPPING

HORIZONTAL PROFILE

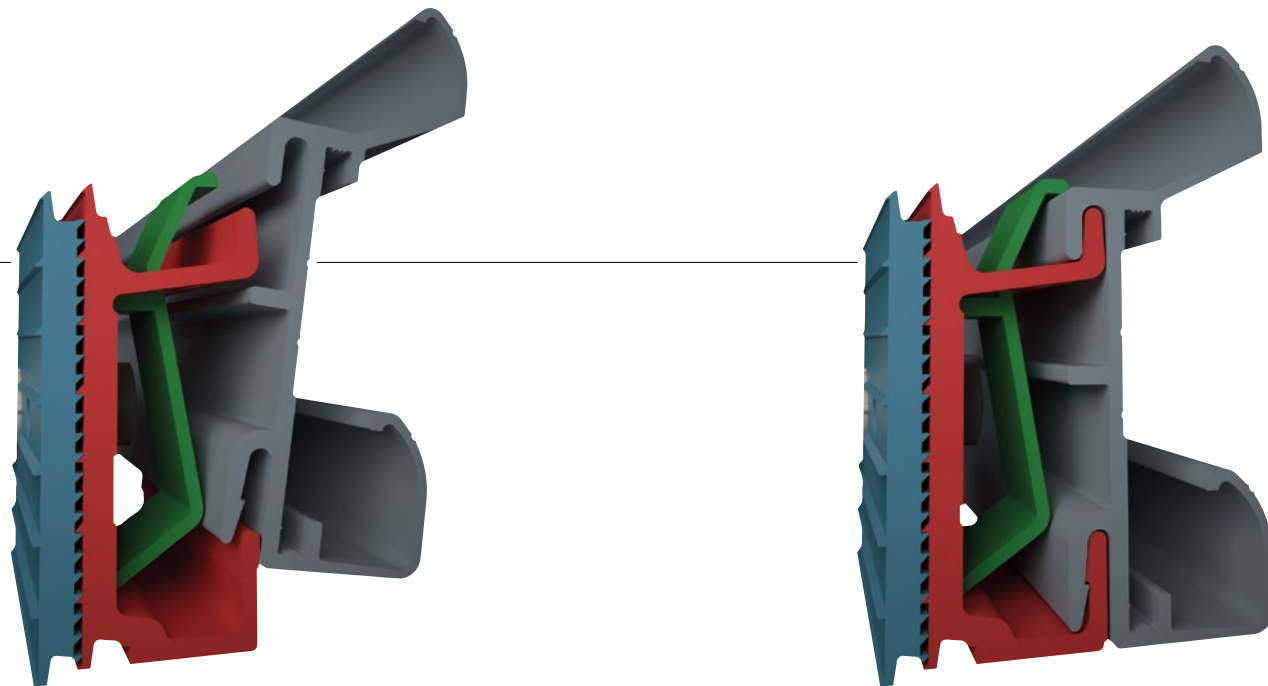

DILATATION

