


CLAW connector
PATENTED

VERTICALsupport

PLANIMETRY

In order to correct the plumb, we have greater flexibility to make these adjustments with ± 3 cm between the profile and the mensula (support). For this, we have a wide range of different sizes to meet various needs.

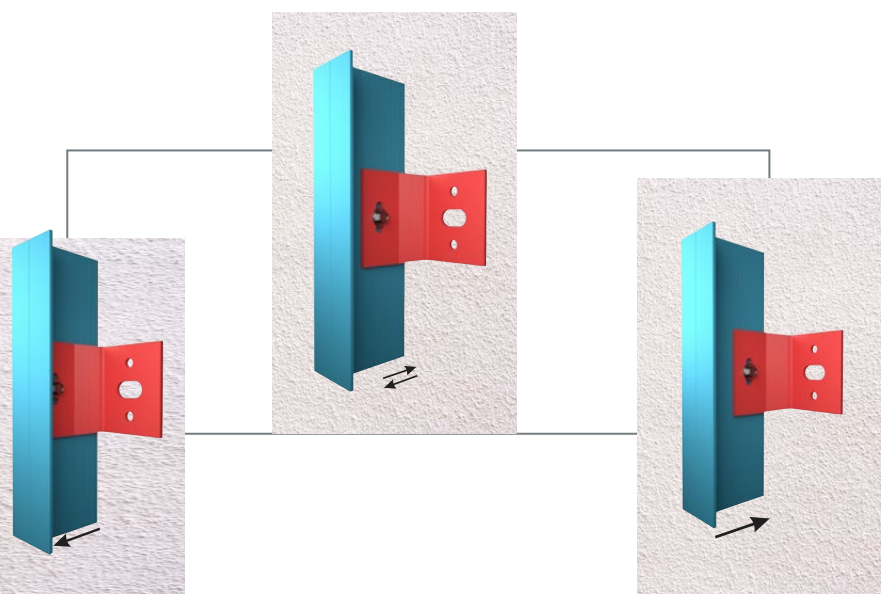


DILATATION

Between the vertical profiles, there must be a separation of 1 cm to accommodate the dilations between them, as the coefficient of expansion of the profile (aluminum) differs from the materials of the structure (concrete, steel, masonry).



CLAW connector

PATENTED

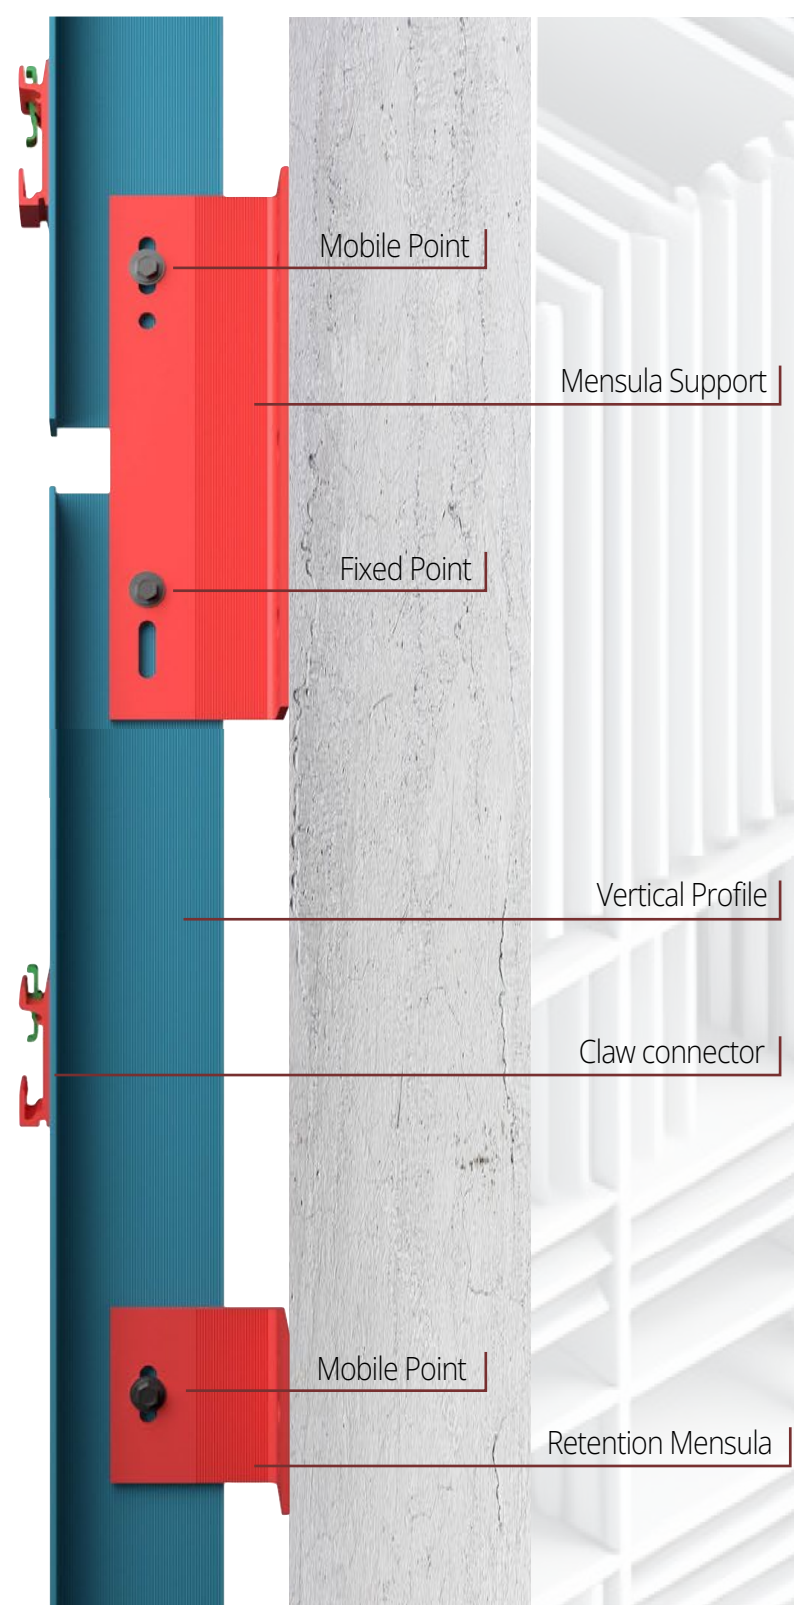



MENSULAS

Versatile supports for fixing vertical profiles, available in different sizes to meet various spacing requirements. Manufactured with versatile machining for the use of suitable screws or rivets for fastening.


STANDARD

MAX

SUPPORT

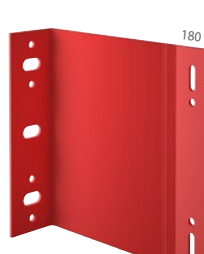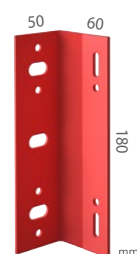

RETENTION



ANCHORAGES

We offer a variety of fastening elements to suit the wall structure, ensuring safety and practicality in all applications.



EXPANSION PLUG 10x80mm



SELF-DRILLING 5,5mm




CHEMICAL ANCHOR \varnothing 8mm



RIVET 6mm



WOOD SCREW 1/4"

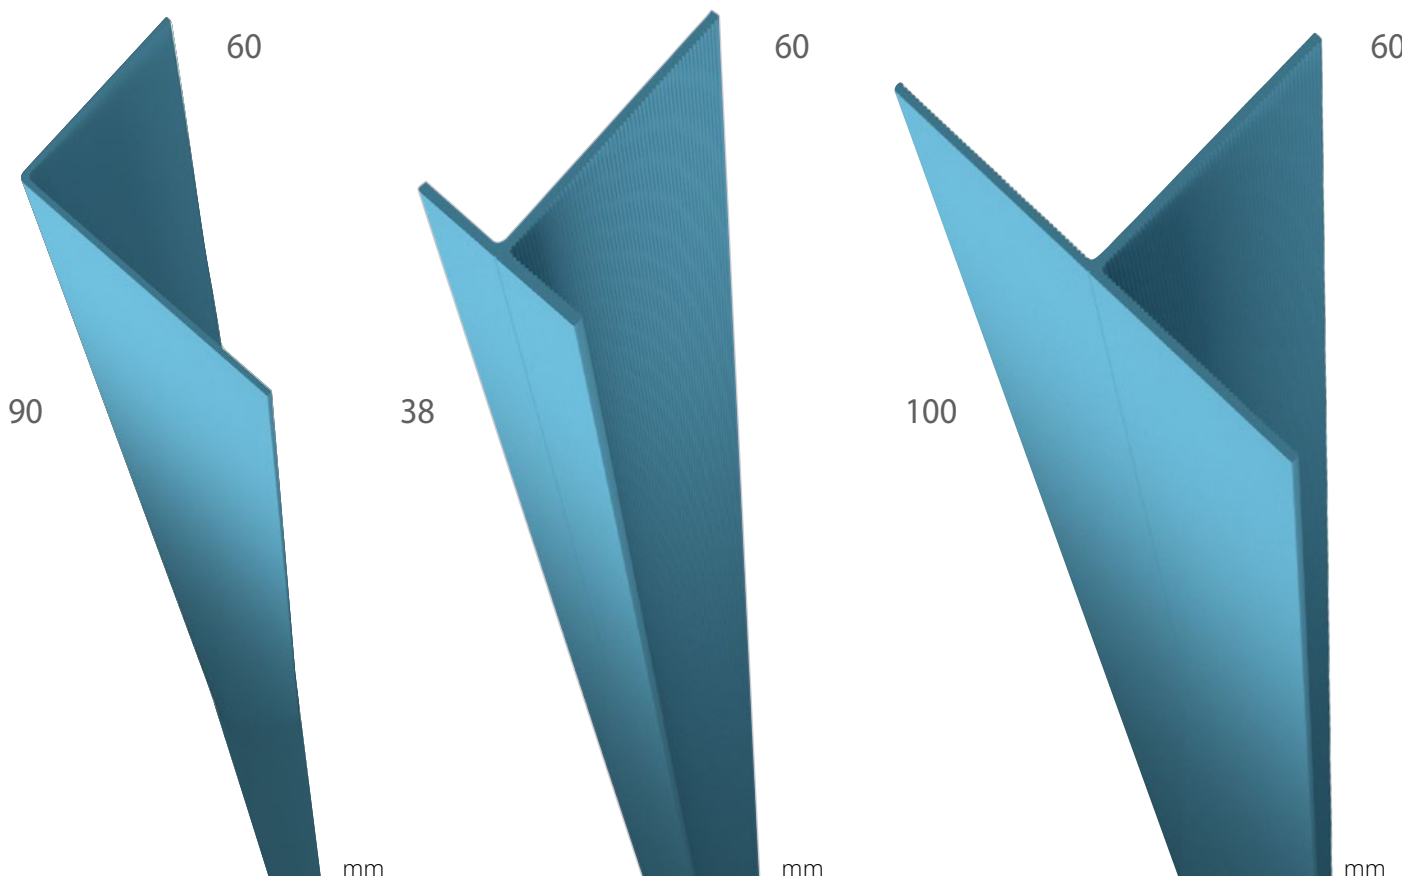

Most commonly used profiles for primary structure, with lengths according to the height of the slabs.

VENFAQ also has special profiles for specific technical performances for unique constructions.

VERTICAL PROFILES